

RXP-500

CHEMICAL REACTION SYSTEMS (RX AND RXP SERIES)

The Chemical Reaction RX (fiberglass tanks) and RXP (HDPE tanks) systems include two reaction tanks that are completely piped and wired, either skid-mounted or supplied with a catwalk frame. The two tanks are designed to work in series. Water will be pumped or flow by gravity into the first tank and then overflow to the second tank. From the second tank, the water flows to a separation device, such as the concentration tank of a microfilter or the flocculation chamber of a clarifier.


The reaction system includes one mixer per tank, with pH/ORP probes and chemical feed pumps as required. On RX/RXP systems less than 1,000 gallon capacity, the mixing tank is mounted on a skid with a frame.

The frame supports the mixer, probes, and chemical pumps. The electrical control box, piping manifolds, conduit and wiring harnesses are also attached to this frame. When necessary, steps are supplied for operator access to the system.

Reaction systems above 1,000 gallons are designed with a freestanding catwalk frame. The mixing tanks are slid into place underneath the catwalk frame. Additional chemical feed packages can be added to the basic system.

Features

- Fully assembled at the factory
- Factory tested
- Units are either skid-mounted or catwalk integrated
- Units are match marked for ease of reassembly
- Rapid installation assured by skidded assemblies

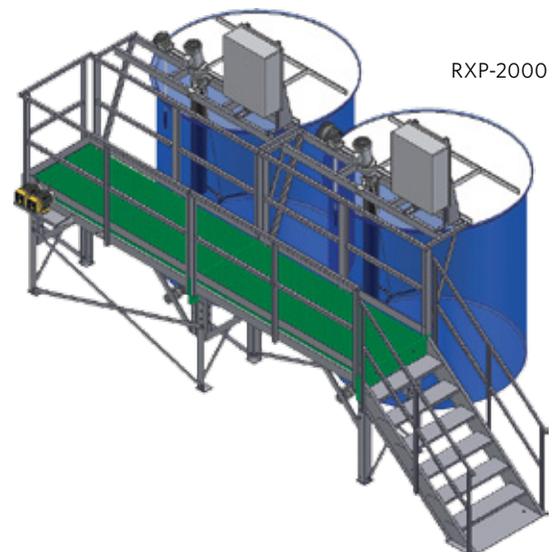

RXP-2000

CHEMICAL REACTION SYSTEMS

Model Number	RX/RXP-250	RX/RXP-500	RX/RXP-1000	RX/RXP-2000	RX-3000	RX-5000
Number of Tanks	Two	Two	Two	Two	Two	Two
Tank Material	FRP/HDPE	FRP/HDPE	FRP/HDPE	FRP/HDPE	FRP	FRP
Tank Volume (gallons)	250 gallons 0.95 m ³	500 gallons 1.9 m ³	1,000 gallons 3.8 m ³	2,000 gallons 7.6 m ³	3,000 gallons 11.4 m ³	5,000 gallon 18.9 m ³
Type	Vertical Cylindrical	Vertical Cylindrical	Vertical Cylindrical	Vertical Cylindrical	Vertical Cylindrical	Vertical Cylindrical
Method of Construction	Skidded	Skidded	Catwalk-Mounted	Catwalk-Mounted	Catwalk-Mounted	Catwalk-Mounted
Recommended Through-Put	20 gpm 4.5 m ³ /hr	40 gpm 9.1 m ³ /hr	80 gpm 18.2 m ³ /hr	160 gpm 36.3 m ³ /hr	240 gpm 54.5 m ³ /hr	400 gpm 90.9 m ³ /hr
Mixers	1/4 HP	1/3 HP	1/2 HP	1 HP	2 HP	2 HP

VALVES AND PIPING CONNECTIONS

Model Number	RX/RXP-250	RX/RXP-500	RX/RXP-1000	RX/RXP-2000	RX-3000	RX-5000
Outlet Connection	3" Male Pipe Stub	4" Male Pipe Stub	6" Male Pipe Stub	6" Male Pipe Stub	8" Male Pipe Stub	12" Flange
Drain Valve	2" True Union Ball Valve	2" True Union Ball Valve	2" True Union Ball Valve	2" True Union Ball Valve	2" True Union Ball Valve	2" True Union Ball Valve

SKID REQUIREMENTS

Model Number	RX/RXP-250	RX/RXP-500	RX/RXP-1000	RX/RXP-2000	RX-3000	RX-5000
Mounting	Each tank is mounted on its own skid. Skids are interlocked for ease of reassembly.	Each tank is mounted on its own skid. Skids are interlocked for ease of reassembly.	Tanks are floor mounted with mixers and all other components mounted off the catwalks.	Tanks are floor mounted with mixers and all other components mounted off the catwalks.	Tanks are floor mounted with mixers and all other components mounted off the catwalks.	Tanks are floor mounted with mixers and all other components mounted off the catwalks.
Paint	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish	Near white metal sandblast + 2-3 mil primer + 3-5 mil finish
Dimensions (L x W x H)	110" x 72" x 85" (2,794 x 1,829 x 2,159 mm)	110" x 72" x 85" (2,794 x 1,829 x 2,159 mm)	200" x 113" x 145" (5,080 x 2,870 x 3,683 mm)	200" x 133" x 145" (5,080 x 3,378 x 3,683 mm)	200" x 143" x 170" (5,080 x 3,632 x 4,318 mm)	220" x 165" x 170" (5,588 x 4,191 x 4,318 mm)
Shipping Weight	1,758 lbs (797 kg)	2,532 lbs (1,148 kg)	4,890 lbs (2,218 kg)	5,433 lbs (2,464 kg)	6,382 lbs (2,895 kg)	7,332 lbs (3,326 kg)
Operating Weight	5,928 lbs (2,689 kg)	10,872 lbs (4,931 kg)	21,570 lbs (9,784 kg)	38,793 lbs (17,596 kg)	56,422 lbs (25,592 kg)	90,732 lbs (41,155 kg)



210 Sixth Avenue, Suite 3300, Pittsburgh, PA 15222

+1 (866) 926-8420 (toll-free) +1 (978) 614-7233 (toll)

www.evoqua.com

All information presented herein is believed reliable and in accordance with accepted engineering practices. Evoqua makes no warranties as to the completeness of this information. Users are responsible for evaluating individual product suitability for specific applications. Evoqua assumes no liability whatsoever for any special, indirect or consequential damages arising from the sale, resale or misuse of its products.

© 2017 Evoqua Water Technologies LLC Subject to change without notice EP-CHEMICALRS-DS-0917